


© 1974 TECNICON INSTRUMENTS CORPORATION

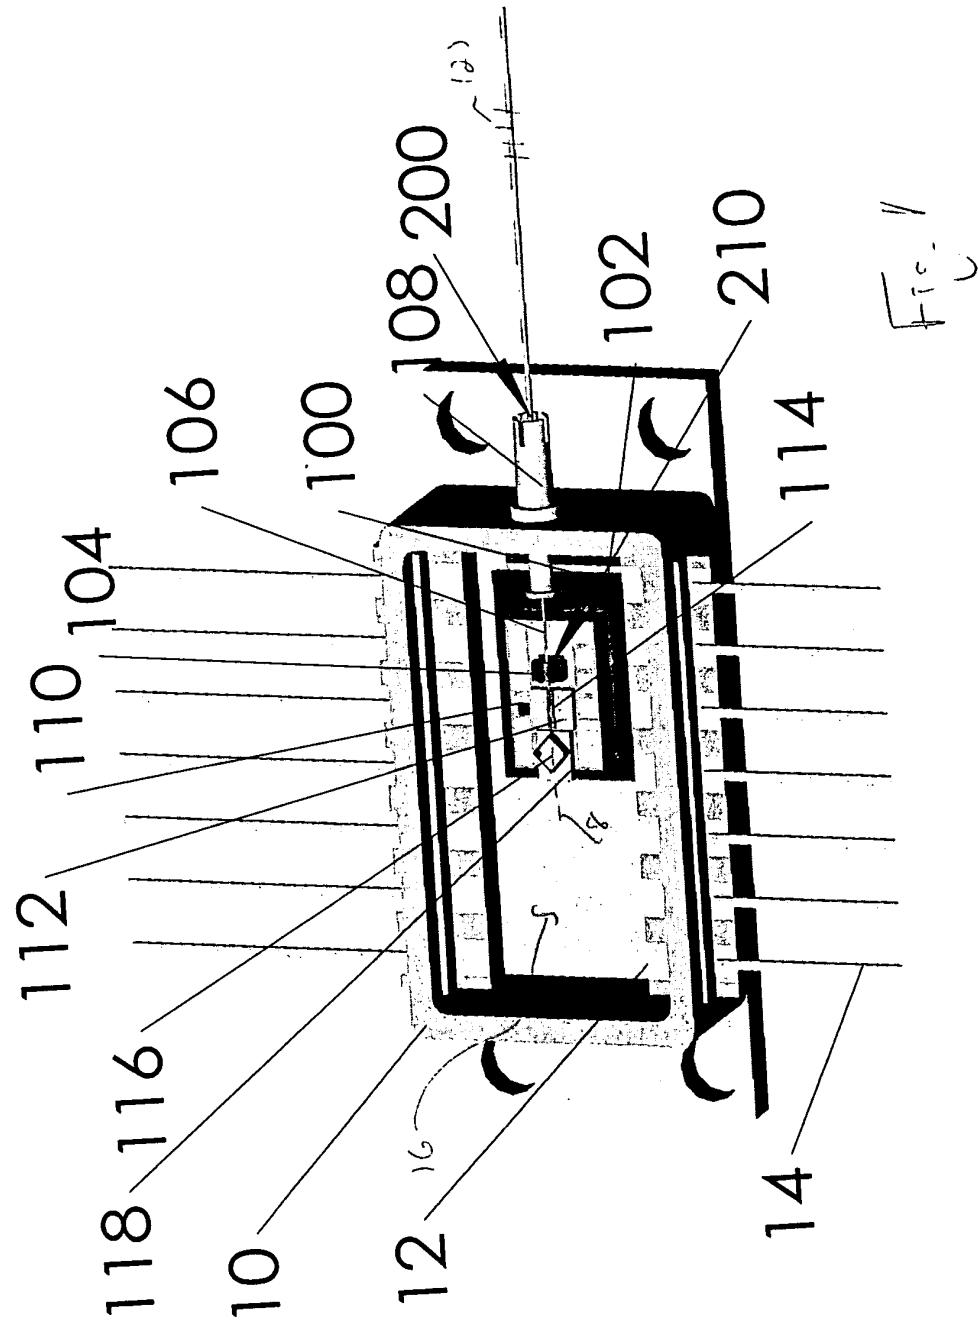

09202740 " 330200

104

011

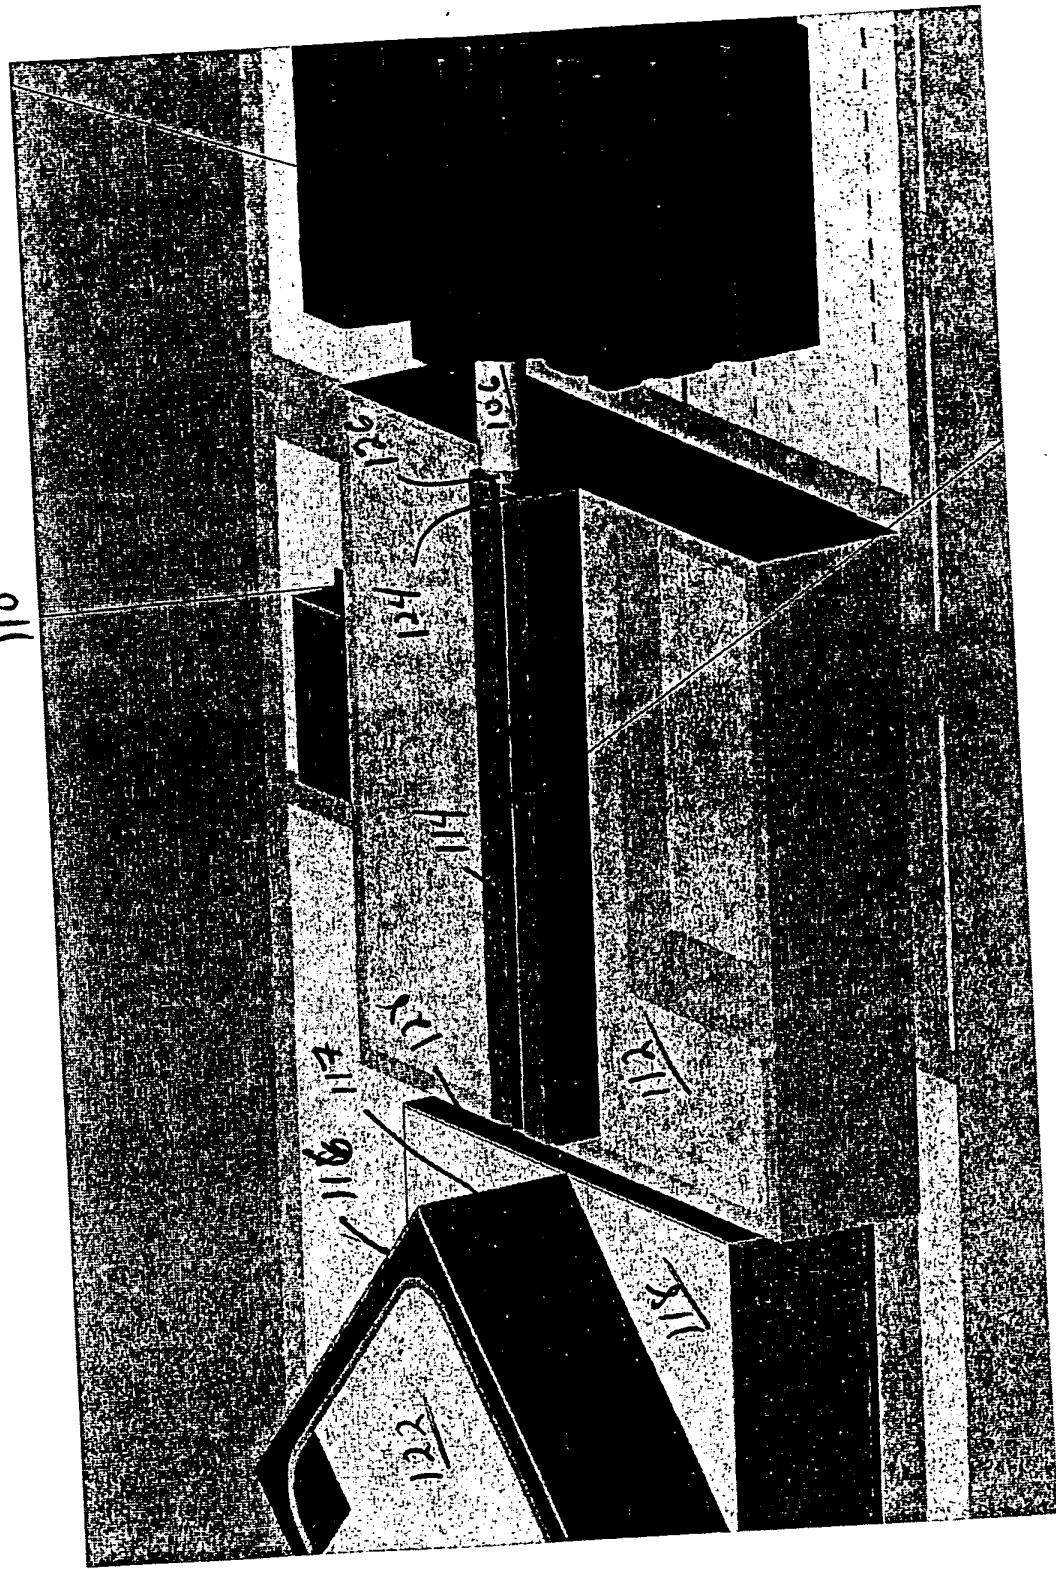


Fig 2.

0020747000

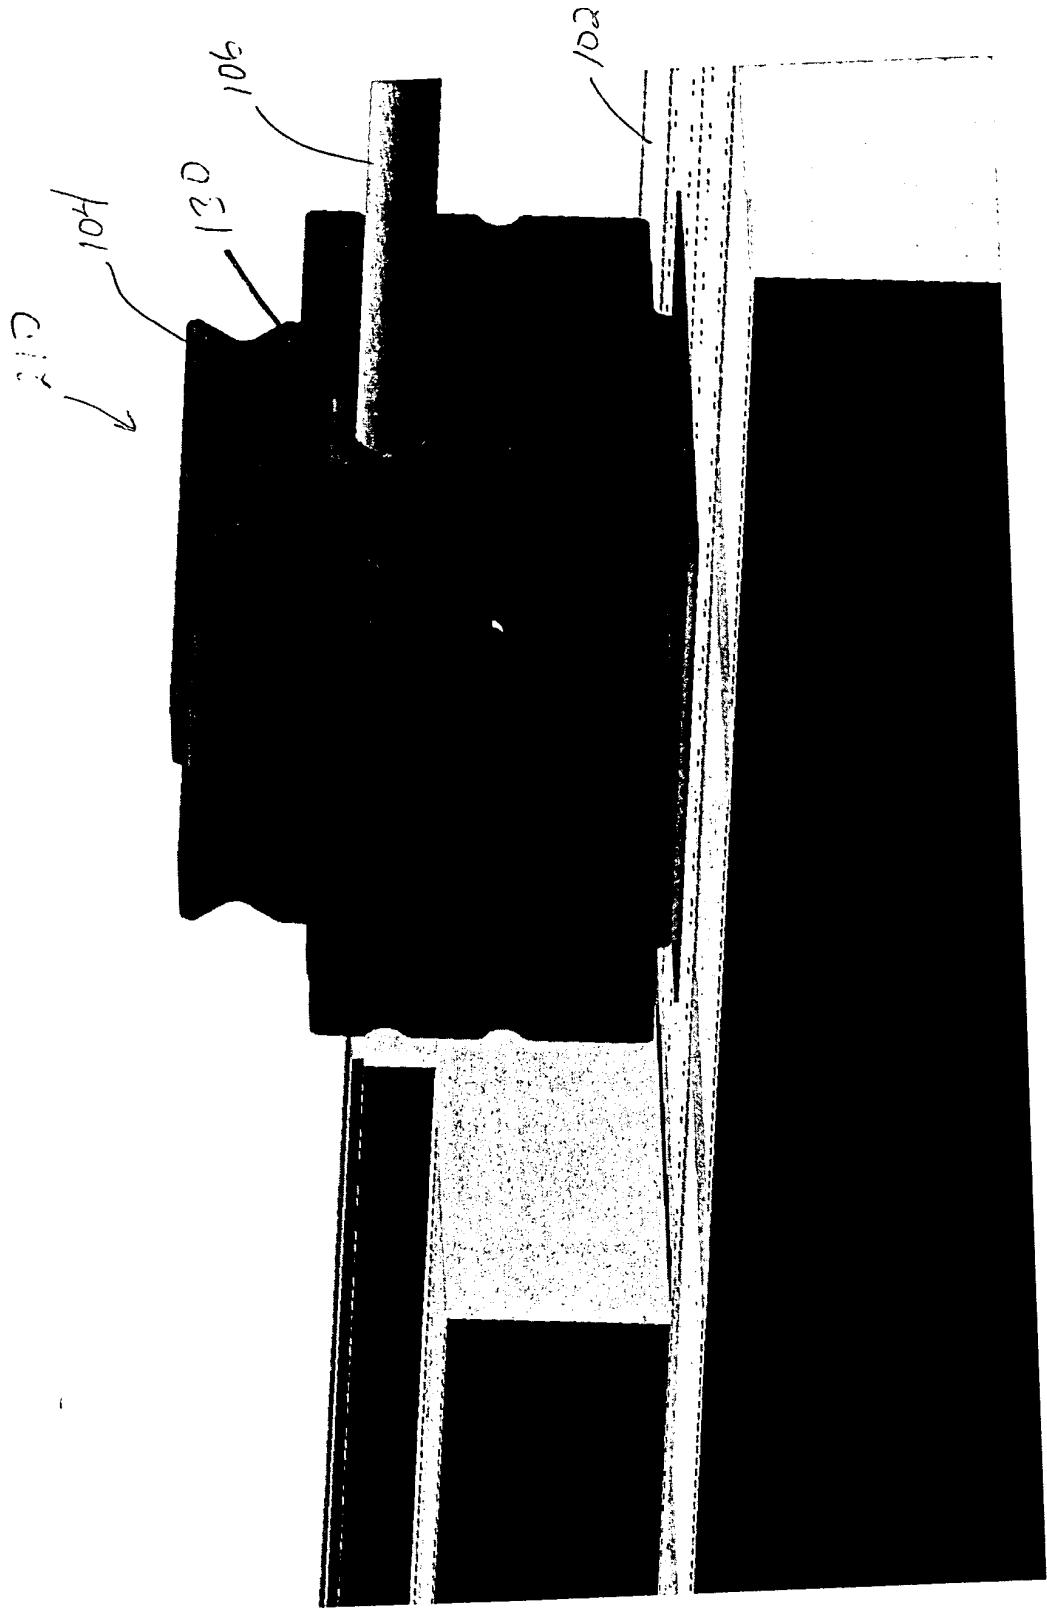


Fig-3

00200101-A0200

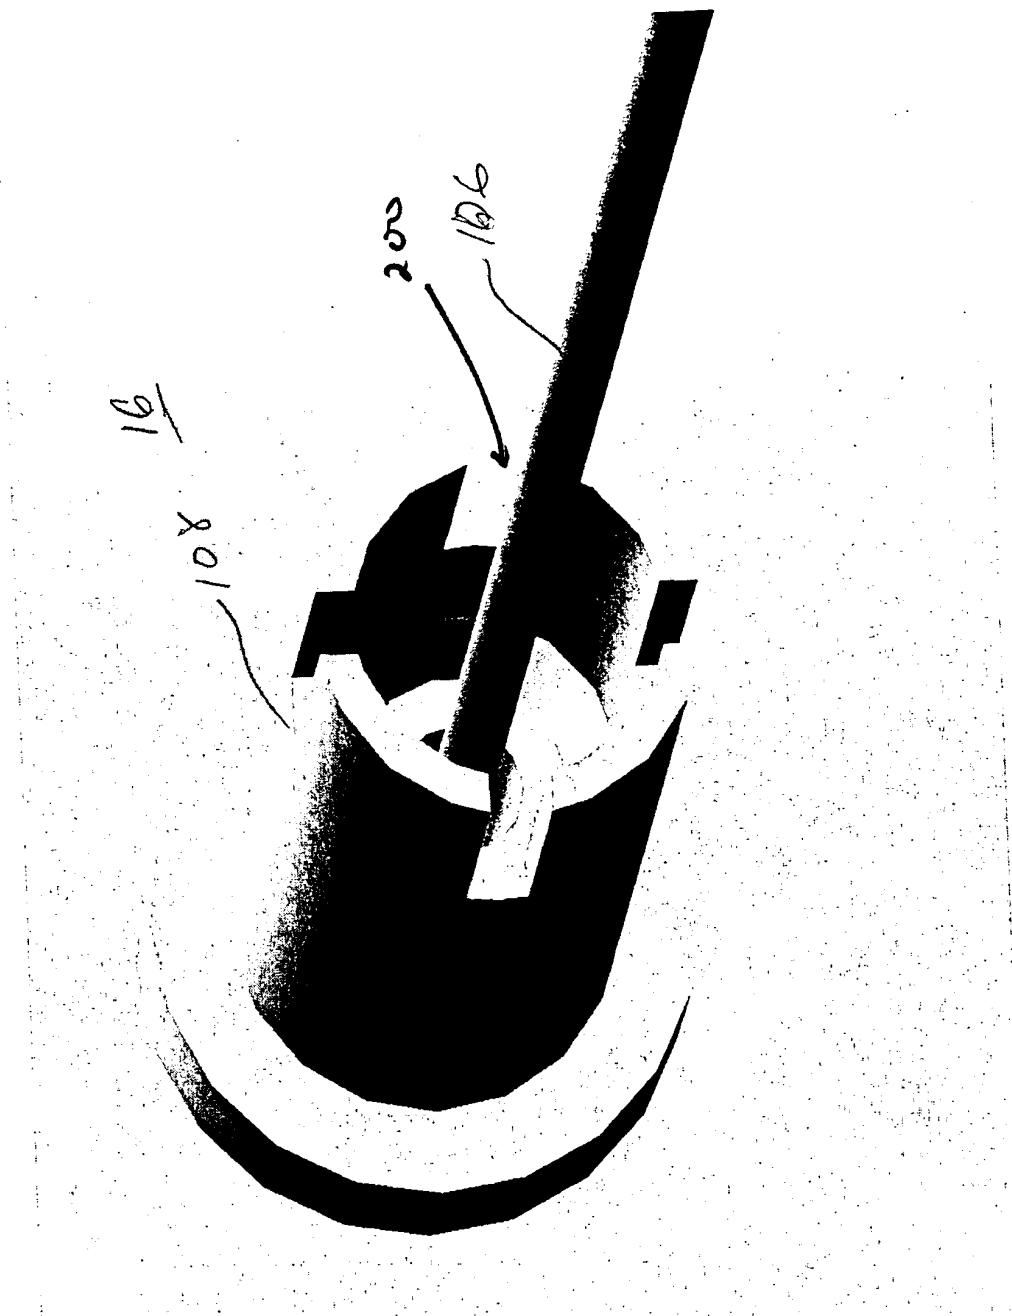


Fig. H

710

Install chip in package

712

Insert fiber through ferrule

714

Energize chip and actively align endface to chip and secure endface to bench

716

Secure fiber to package feedthrough ferrule

Detect PER at pigtail

720

Rotationally align endface to chip to optimize ratio

722

Detect PER at pigtail

724

PER within acceptable range?

726

728

Lid-seal package

Fig. 5

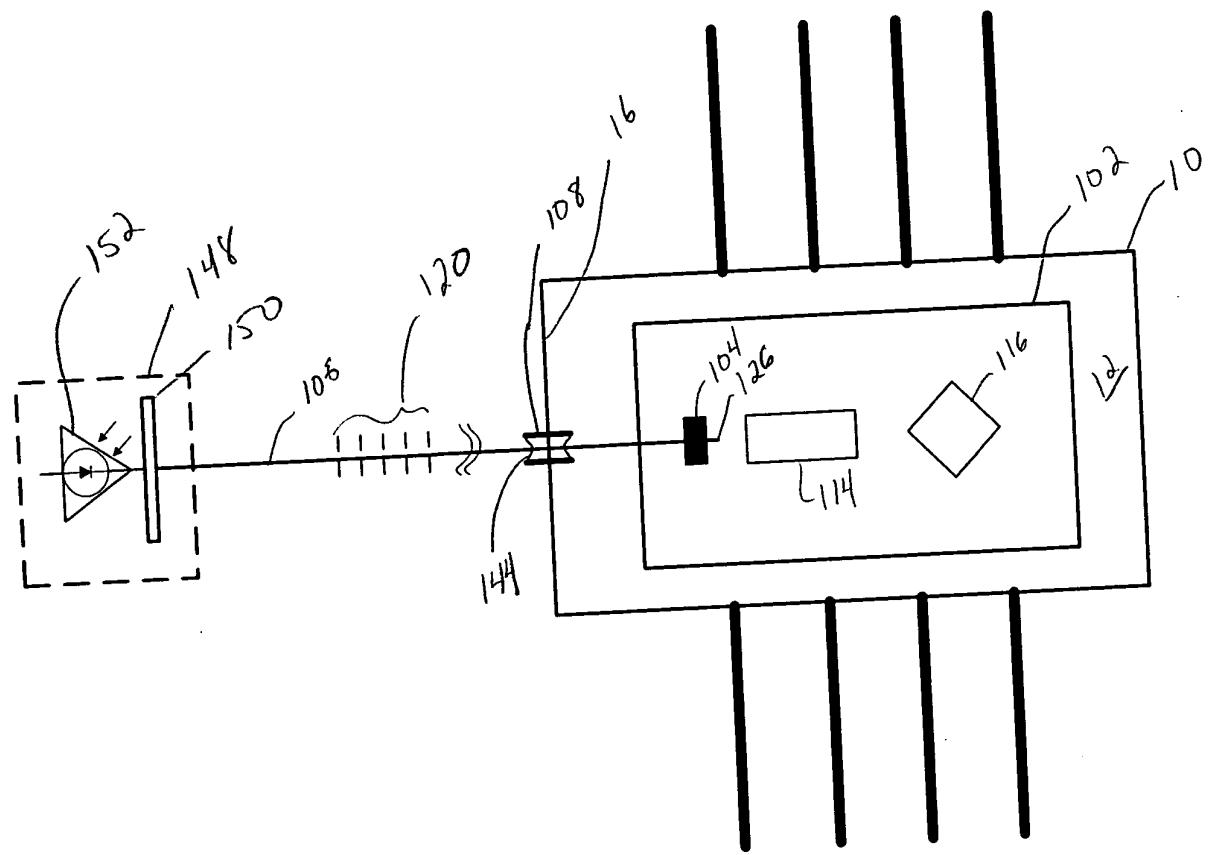


Fig. 6

Fig. 7

102  
106

104

312

310

105